


NOTE:
 BEAM FABRICATOR IS RESPONSIBLE FOR ADJUSTING THE CASTING
 LENGTH TO ACCOMMODATE ANY INCREASE IN BEAM LENGTH DUE TO
 DIMENSION "b". IF DIMENSION "b" IS LESS THAN 40 mm, THE
 END OF THE BEAM DOES NOT NEED TO BE ADJUSTED.

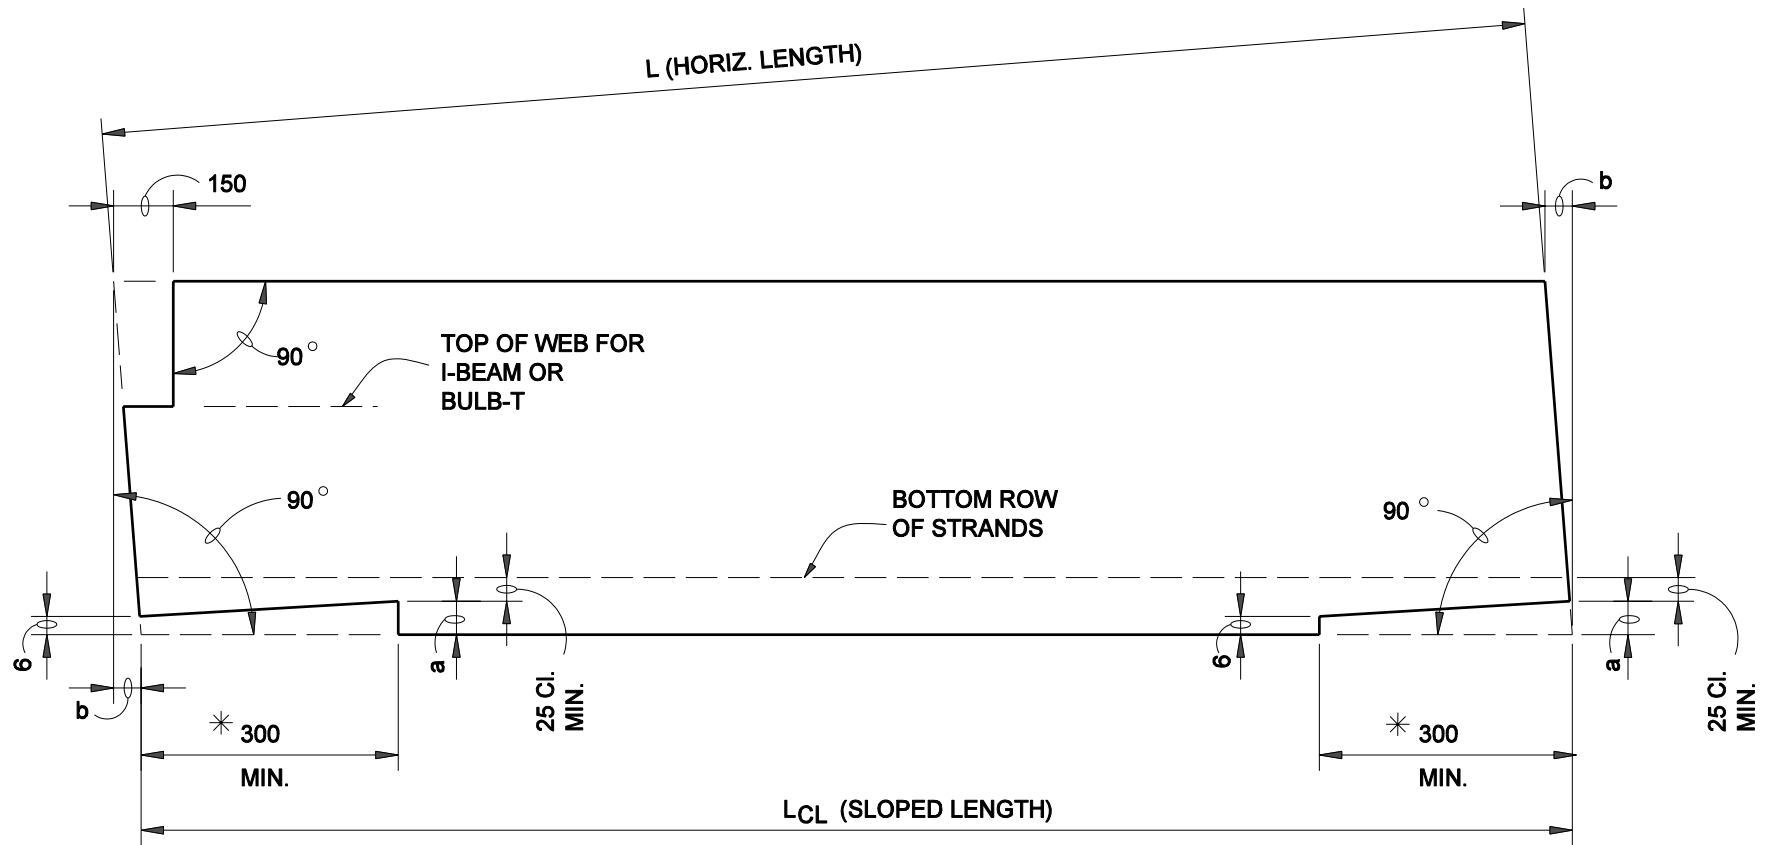

* THE LENGTH OF THE RECESS SHOULD PROVIDE A BEAM OVERHANG OF AT LEAST
 50 mm PAST THE FACE OF THE BEARING PAD FOR BULB-T BEAMS AND 25 mm
 FOR I-BEAMS AND BOX BEAMS.

DIMENSIONING PRECAST BEAM ON SLOPE

Figure 63-11A