


BEAM PROPERTIES

A_B	$= 663,200 \text{ mm}^2$	
I_B	$= 254,931 \times 10^6$	mm^4
S_{TB}	$= 346,028 \times 10^3$	mm^3
S_{BB}	$= 271,415 \times 10^3$	mm^3
Y_{TB}	$= 736.7 \text{ mm}$	
Y_{BB}	$= 939.3 \text{ mm}$	
W_t	$= 15.65 \text{ kN/m}$	

BEAM PROPERTIES

A_B	$= 663,200 \text{ mm}^2$	
I_B	$= 254,931 \times 10^6$	mm^4
S_{TB}	$= 346,028 \times 10^3$	mm^3
S_{BB}	$= 271,415 \times 10^3$	mm^3
Y_{TB}	$= 736.7 \text{ mm}$	
Y_{BB}	$= 939.3 \text{ mm}$	
W_t	$= 15.65 \text{ kN/m}$	

* DENOTES EPOXY COATED

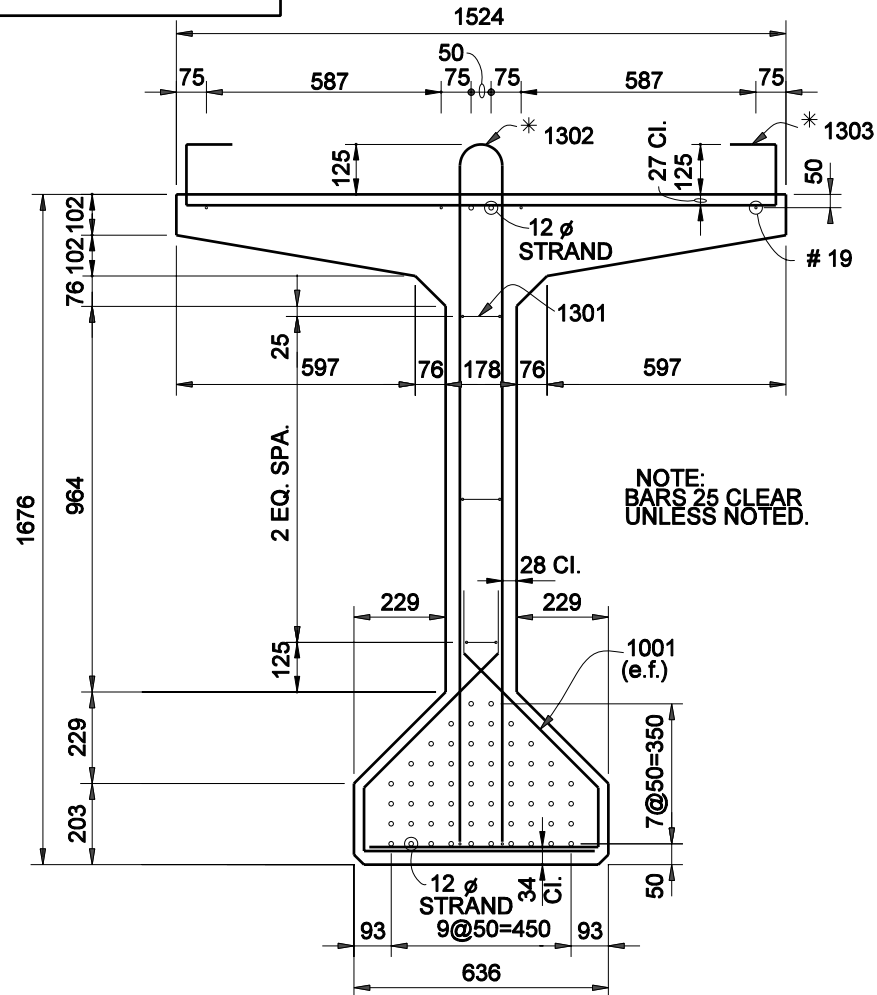

BULB - TEE BEAM
TYPE BT 1676x1524
Figure 63-14 Q